




# ARFEN

ARFEN İNŞAAT TAAHHÜT SAN. ve TİC. LTD. ŞTİ.

www.arfen.com

## PLASTIC SKIRTING SERIES

### Flexible Plastic Skirting

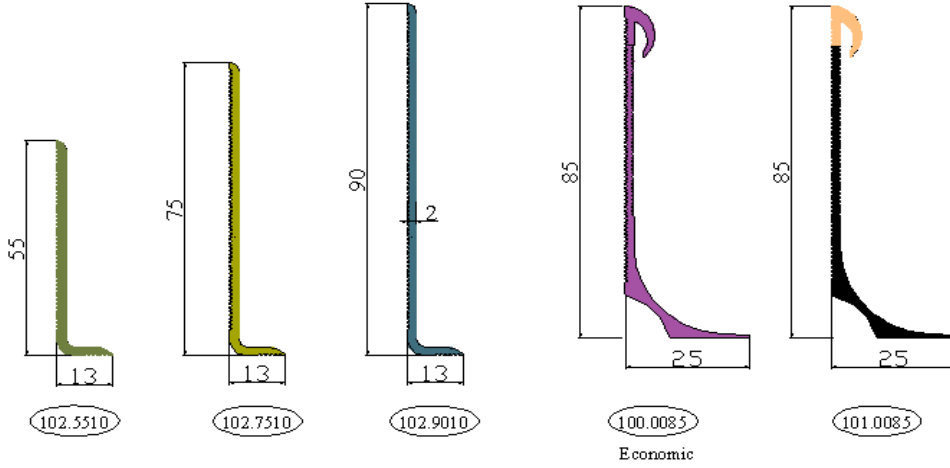

### APPLICATIONS :

These flexible plastic skirting is fixed with suitable adhesive on wall while flooring completion.

Before the application draw a chalk line at the proper location on the wall to ensure a level installation.

Apply adhesive on wall and back of the plastic skirting before the application. Wait approximately 15 minutes and install on wall. Wall and application area should be cleaned before applying adhesive.

Be careful to not overflow while application.

Henkel Pattex adhesive should be used to install skirting on the wall.

For 100,0085 series first step cut correct lengths and put into vinyl flooring second step apply adhesive and wait 15 minutes and install on wall.

### SPECIAL PROPERTIES.

Profile Code	Height mm	Standart roll Length	Thickness of aluminium profile	application method	Material
102,5510	55	25,00	2	with adhesive	Plastic
102,7510	75	25,00	2	with adhesive	Plastic
102,9010	90	25,00	2	with adhesive	Plastic
100,0085	85	25,00	1,3	with adhesive	Plastic
101,0085	85	25,00	2	with adhesive	Plastic

Production Length :25,00 metres 100 metre/cartoon

Easy and Quick installation.